WASH BAY

designed and created for your needs





X-SPLASHX-4












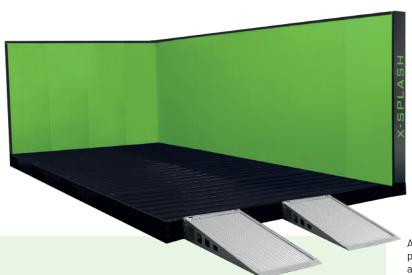





APPLICATIONS







FEATURES

- The system allows you to recycle water and therefore the contaminated water does not get into the drainage system;
- Less water used means more money is saved, and more savings made with handling and washing time;
- Easily transportable, easy to assemble and disassemble;
- Innovative design and the modular construction system make our wash bays suitable for several indoor and outdoor uses;
- Environmentally friendly.

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. It's composed of a wash bay with diamond tread ramps and 2200 mm high walls. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a Solids Collection tank at the rear of the wash bay. Inside the rear tank a float switch activates a diaphragm pump that delivers the dirty water into the Filtration Tank to commence the filter process. After the water, has been through the filter process a booster pump delivers the water again to your pressure washer. Through the filtering system it allows you to use the same water repeatedly. The filters inside the separator tank can be easy replaced guaranteeing an adequate filtering barrier.

Technical data	
Useful dimension (mm)	3000 x 6000
Total dimension (mm)	3590 x 7250
Filtration tank dimension (mm)	(X-10) 2810 x 740 x 990h
Maximum load capacity (kg)	5000
Walls standard height (mm)	2200
Total dry weight of the bay (kg)	2240
Diaphragm pump	0,054 kW - 17lt/min
Booster pump	0,37 kW - 5 to 40 lt/min
Filtering system	X-10
Option filtering system	X-30, X-60
Option maximum load capacity (kg)	20.000



