WASH BAY

designed and created for your needs



X-SPLASHX-8^{CT}

filtering system



3000 liters' capacity





more sustainable and environmentally friendly future







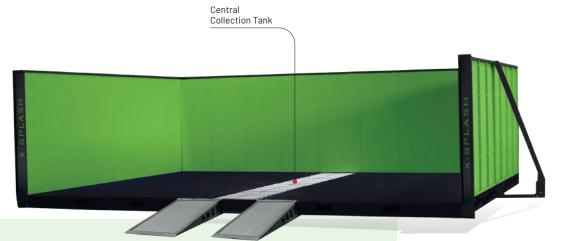







APPLICATIONS







FEATURES

- The system allows you to recycle water and therefore the contaminated water does not get into the drainage system;
- Less water used means more money is saved, and more savings made with handling and washing time;
- Easily transportable, easy to assemble and disassemble;
- Innovative design and the modular construction system make our wash bays suitable for several indoor and outdoor uses;
- Environmentally friendly.

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. It comes as standard with heavy duty automatic X-30 filtration systems. The wash bay is made with a diamond tread ramp and a 2200 mm high wall. The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay. In this version the side collection tanks are substitute from a central collection tank. The tank is 750 mm wide and collect mud, stones and debris from the lateral mounted modules. The wide size allow customer to clean it using a little digger. Covering grid can be removed thanks to the kit of lifting hooks available with the system.

The central collection tank increase the net cleaning surface from 36 to 40,5 sqm and the dimension of the bay to 6 x 6,75m.

Technical data	
Useful dimension (mm)	6750 x 6000
Total dimension (mm)	8334 x 8740
Filtration tank dimension (mm)	(X-30) 3650 x 1010 x 2160h
Maximum load capacity (kg)	5000
Walls standard height (mm)	2200
Total dry weight of the bay (kg)	5950
Diaphragm pump	0,054 kW - 17lt/min
Booster pump	0,37 kW - 5 to 40 lt/min
Filtering system	X-30
Option filtering system	X-60
Option maximum load capacity (kg)	20.000



