

WASH BAY



**100%**  
**water**  
recycling

# X-SPLASH X-8

**designed and created  
for your needs**

**filtering system**



**Mod. X-30**

**3000 liters' capacity**



**more sustainable  
and environmentally  
friendly future**




**TRIME**<sup>®</sup>  
Water Treatments

# X-SPLASH X-8

WASH BAY



**100%**  
**water**  
**recycling**

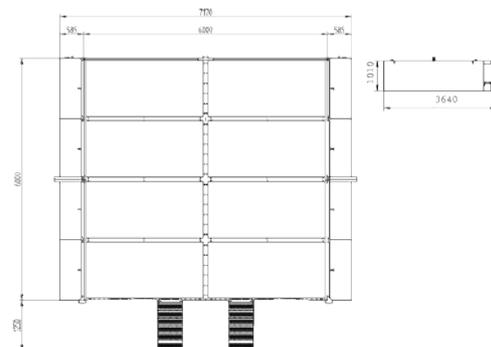

**ZERO**  
emissions

**water**  
saving

## APPLICATIONS



Constructions



Industrial



Large wash size

## FEATURES

- ✔ The system allows you to recycle water and therefore the contaminated water does not get into the drainage system;
- ✔ Less water used means more money is saved, and more savings made with handling and washing time;
- ✔ Easily transportable, easy to assemble and disassemble;
- ✔ Innovative design and the modular construction system make our wash bays suitable for several indoor and outdoor uses;
- ✔ Environmentally friendly.

A self-contained, environmentally friendly, cleaning system for construction plant and equipment. **It comes as standard with heavy duty automatic X-30 filtration systems.** The wash bay is made with a diamond tread ramp and a 2200 mm high wall. **The wash bay floor pan directs the dirty water and sludge from the equipment being cleaned to a solids collection tank at the rear of the wash bay.** Inside the rear tank, a float switch activates a diaphragm pump which delivers the dirty water into the filtration tanks to start the filtration process. After the water has been through this process, a booster pump delivers the water again to your pressure washer. Through the filtrating system, you can use the same water repeatedly. **The filters inside the separator tank can be easily replaced, guaranteeing an adequate filtering barrier.**

## Technical data

Useful dimension (mm)	<b>6000 x 6000</b>
Total dimension (mm)	<b>7180 x 7250</b>
Filtration tank dimension (mm)	<b>(X-30) 3650 x 1010 x 2160h</b>
Maximum load capacity (kg)	<b>5000</b>
Walls standard height (mm)	<b>2200</b>
Total dry weight of the bay (kg)	<b>4370</b>
Diaphragm pump	<b>0,054 kW - 17lt/min</b>
Booster pump	<b>0,37 kW - 5 to 40 lt/min</b>
Filtering system	<b>X-30</b>
Option filtering system	<b>X-60</b>
Option maximum load capacity (kg)	<b>20.000</b>



**easy handling & transportability**



**TRIME®**

Sales Dept. +39 0382 406 252 - [www.trime.it](http://www.trime.it) - [info@trime.it](mailto:info@trime.it)

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.